


Raychem Stripping Tool For Extruded And Bonded Cable Screens

Raychem stripping tool HVIA-STRIPPER-35/90 for extruded and bonded cable screens and primary insulation for cable diameters from 35 to 90 mm

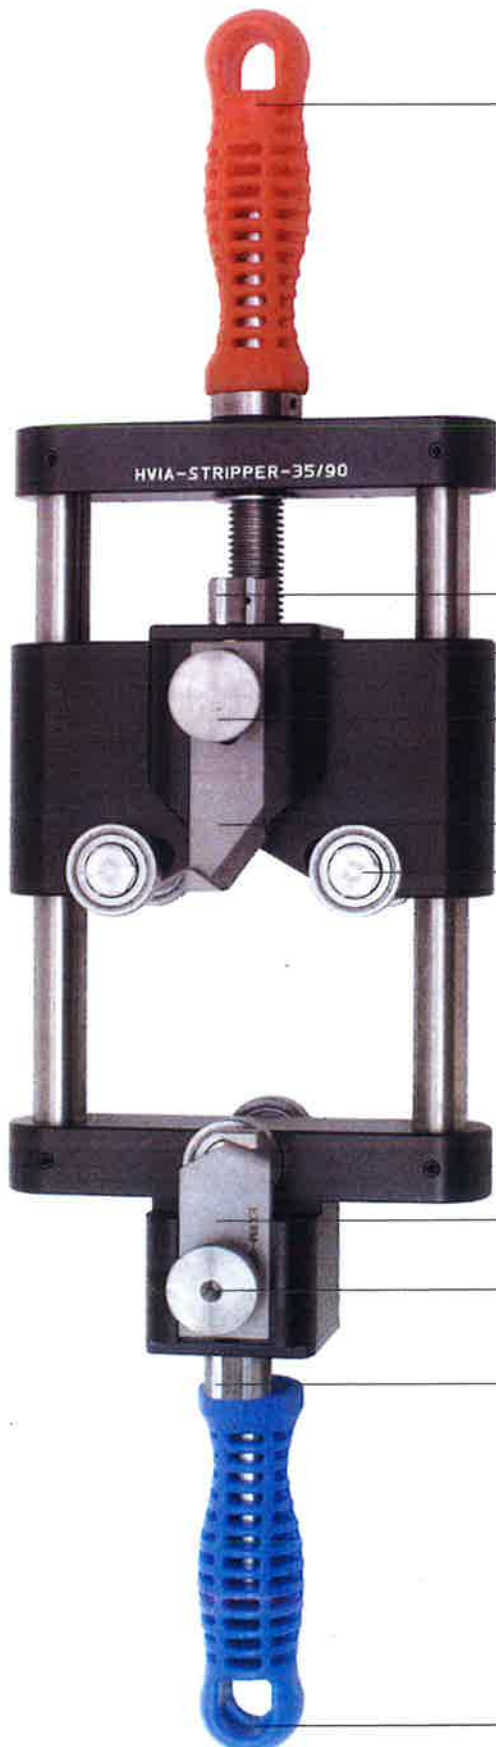

Handle to adjust spindle to cable diameter

Setting screw to adjust cutting depth of blade for removing primary insulation

Locating hole for blade

Locking screw for cable insulation blade

Blade EXRM-0982-I-22.5 for removing primary insulation

Adjustable rollers (2 positions)

Blade EXRM-0982-R-20 for removing bonded cable screen (US-Version: EXRM-0982-R-20-4)

Locking screw for cable screen blade

Setting screw to adjust cutting depth of blade for chamfering the semicon screen at screen transition

Fixed handle

Raychem Stripping Tool For Extruded And Bonded Cable Screens



The stripping blade is adjustable.




Coarse adjustment:
Remove locking screw
and reposition blade.



Fine adjustment:
Loosen locking screw to adjust
blade to desired cutting depth via
the setting screw.




Adjust rollers to cable
diameter until they are in contact
with the bonded screen.

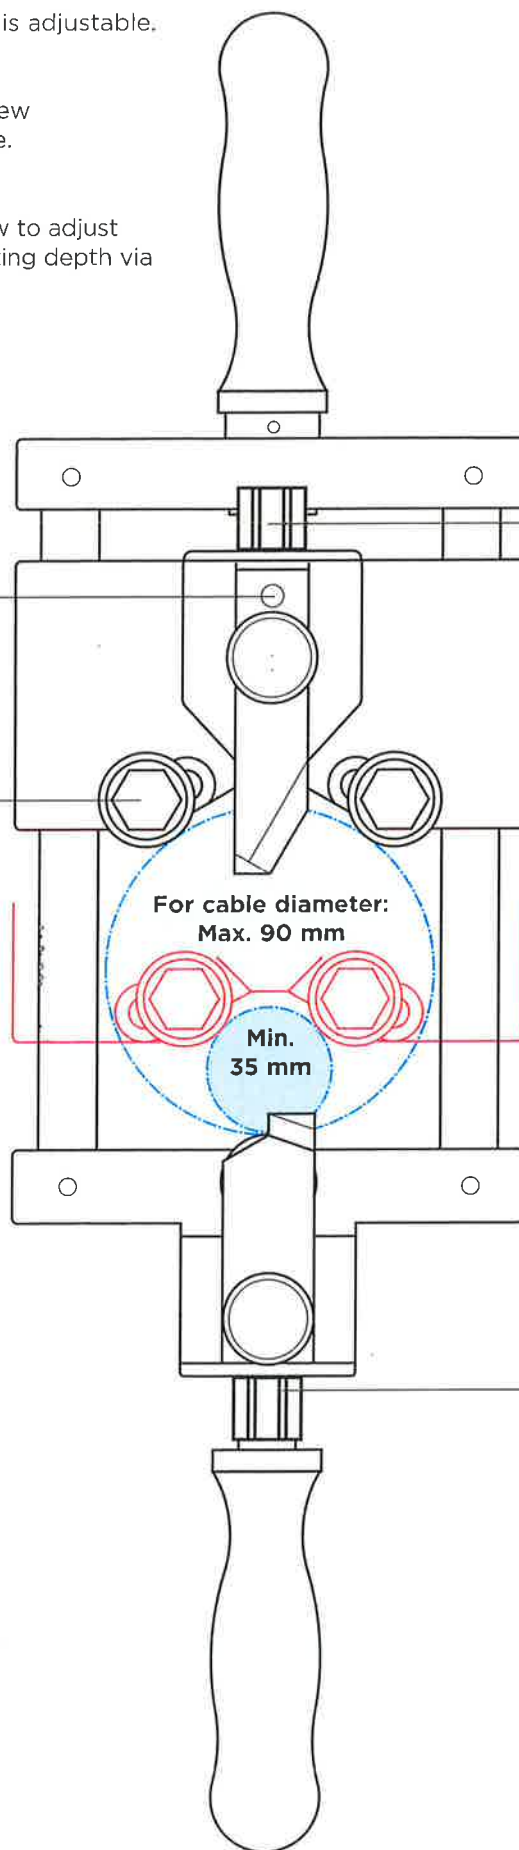

Loosen locking screw
to adjust blade to
desired
cutting depth.

Loosen locking screw
to adjust blade to
desired cutting depth.



Notes:

- The tool is supplied with blades packed separately in the case.
- The cable must be aligned at right angles to the stripper tool.
- Apply a thin layer of silicon lubricant to the bonded screen for easy movement.
- The tool should be operated only by people trained in handling this type of tool.