Industrial Glands

CW Brass Gland with Integral Earth 419CE Series

Application

> For steel wire armour cable

Features & Benefits

> Brass indoor and outdoor cable gland with earth bonding connection
> Suitable for circular galvanised steel single wire armoured, plastic or rubber sheathed cables
> Outer seal grips sheath of cable
> For use in most climatic conditions, weatherproof and waterproof
> Three part armour lock with separate armour locking ring
> Accessories available separately

Technical Data

> EN50262
> Gland rated to IP66 with use of suitable sealing washer or thread sealant at gland interface
> Service temperature range -20°C to +90°C
> Integral earth connection complies with GDCD 190 Category A (43.3kA for 1 second)

Ref: CWBINT/05/08

Prysmian Cables & Systems Limited, Components Unit, Oak Road, Wrexham Industrial Estate, Wrexham, LL13 9PH, UK
Commercial Enquiries, Tel +44 (0) 845 767 8345, Fax: +44 (0) 23 8029 5465
www.prysmian.co.uk

CW Brass Gland with Integral Earth 419CE Series

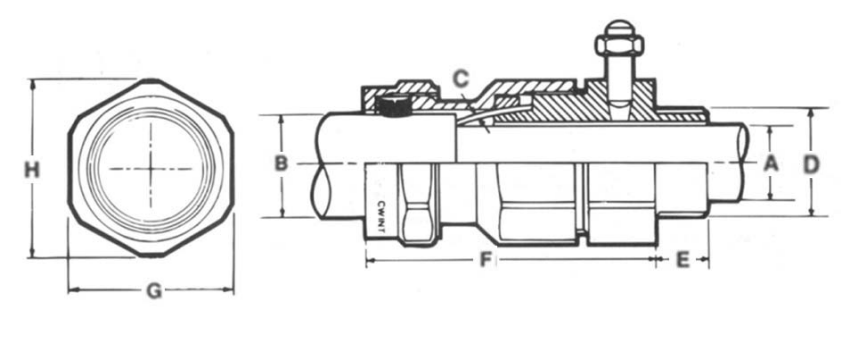

Gland Details

Cable dimensions accommodated mm					Gland Reference		Glands dimension mm					Accessories
Diameter				Armour wire diameter	Size	Design Number	Entry thread		Approx. length from shoulder	Hexagon size		Brass backnut
Under armour A		Overall B					Size	Length		Across flats	Across corners	Design number
Min	Max	Min	Max	C			D	E	F	G	H	
-	11.6	8.0	15.8	0.9/1.25	20S	419CE-52	M20 × 1.5	10	56	30.5	34.0	429AA-53
-	13.9	11.7	20.8	0.9/1.25	20	419CE-53	M20 × 1.5	10	56	30.5	34.0	429AA-53
-	19.9	17.0	27.2	1.25/1.6	25	419CE-55	M25 × 1.5	10	63	42.4	48.0	429AA-55
-	26.2	23.5	33.5	1.6/2.0	32	419CE-56	M32 × 1.5	10	73	56.4	61.5	429AA-56
-	32.1	29.0	39.9	1.6/2.0	40	419CE-57	M40 × 1.5	15	77	56.4	61.5	429AA-57
-	44.0	39.5	52.6	2.0/2.5	50	419CE-59	M50 × 1.5	15	84	70.1	77.2	429AA-59
-	55.9	51.3	65.3	2.5	63	419CE-61	M63 × 1.5	15	84	90.1	100.0	429AA-61
-	67.9	62.5	78.0	2.5	75	419CE-63	M75 × 1.5	15	94	106.2	117.0	429AA-63
-	74.0	68.0	88.0	3.15	85	419CE-64	M85 × 2	20	125	115.0	126.0	429AA-64

Ref: CWBINT/05/08

Prysmian Cables & Systems Limited, Components Unit, Oak Road, Wrexham Industrial Estate, Wrexham, LL13 9PH, UK
Commercial Enquiries, Tel +44 (0) 845 767 8345, Fax: +44 (0) 23 8029 5465
www.prysmian.co.uk