

## Flameproof Glands

## E1XF EEx d IIC & EEx e II Brass Gland 473AA Series



### Application

### Features & Benefits

### Technical Data

- > For wire braid cable
- > Brass indoor and outdoor cable gland for use in hazardous areas
- > Suitable for circular, wire braid armour cables with extruded polymeric bedding & oversheath
- > Achieves IP66 seal onto cable and to enclosure with suitable sealing washer or thread sealant
- > Three part armour lock provides mechanical cable retention and electrical continuity
- > Inner seal grips cable bedding and provides additional ingress protection
- > Suitable for most climatic conditions – weatherproof and waterproof
- > Nickel plated versions also available
- > Matching accessory kits available
- > Certified II 2GD, EEx e II & EEx d IIC under ATEX directive 94/9/EC
- > IECEx SIR 10.0071x
- > Certificate number Sira02ATEX3092X
- > Applied Standards:
  - IEC 60079-0: 2004
  - IEC 60079-1: 2007-04
  - IEC 60079-7: 2006-07
  - IEC 61241-0: 2004
  - IEC 61241-1: 2004
  - EN 60079-0: 2006
  - EN 60079-1: 2007
  - EN 60079-7: 2007
  - EN 61241-1: 2004
- > Service temperature -60°C to +90°C
- > May be used in:
  - Zones 0, 1 & 2 with EEx ia IIA, B & C equipment
  - Zones 1 & 2 with EEx ib IIA, b & C equipment
  - Zones 1 & 2 with EEx e II equipment
  - Zone 2 with EEx nA II equipment
  - Zones 21 & 22 with Extd A21 IP66
- > Where the cable is effectively filled, may also be used in:
  - Zones 1 & 2 with EEx d IIC equipment not containing a source of ignition & with a volume less than 2000cm<sup>3</sup>
  - Zones 1 & 2 with EEx d IIA & EEx d IIB equipment not containing a source of ignition & with any volume
  - Zone 1 with EEx d IIA & EEx d IIB equipment containing a source of ignition & with a volume less than 2000cm<sup>3</sup>
  - Zone 2 with EEx d IIA & EEx d IIB equipment containing a source of ignition with any volume
  - Zone 2 with EEx nR II equipment



Ref: E1XF/05/08

**Prysmian Cables & Systems Limited**, Components Unit, Oak Road, Wrexham Industrial Estate, Wrexham, LL13 9PH, UK  
 Commercial Enquiries, Tel +44 (0) 845 767 8345, Fax: +44 (0) 23 8029 5465  
[www.prysmian.co.uk](http://www.prysmian.co.uk)



#### WOKING

Unit 19, Woking Business Park, Albert Drive,  
 Woking GU21 5JY  
 Tel: 01483 747747 • Fax: 01483 747001


#### BRISTOL

The Alpha Centre, Armstrong Way,, Great Western  
 Business Park, Yate, Bristol BS37 5NG  
 Tel: 01454 322555 • Fax: 01454 323555

#### NORTON CANES

Unit 15-16, Bellsizes Close, Norton Canes,  
 Staffordshire WS11 9TQ  
 Tel: 01543 450555 • Fax: 01543 450600

## E1XF EEx d IIC & EEx e II Brass Gland 473AA Series

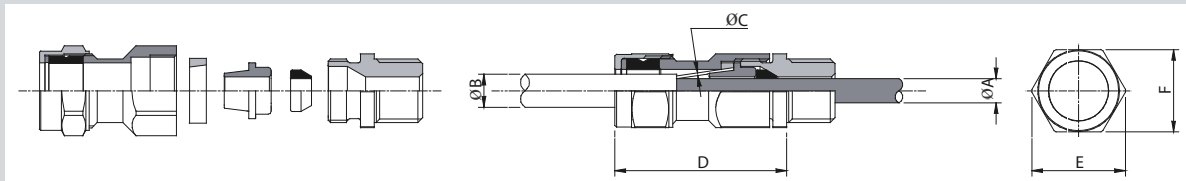

### Gland Details

Basic Size	Gland References & Thread Sizes				Cable Dimensions mm					Gland Dimensions mm		
	Metric		NPT		Inner Sheath Dia. 'A'		Overall Dia. 'B'		Braid Wire Dia. 'C'	Approx. Length 'D'	Hexagon Size	
	Design No.	Thread Size *	Design No.	Thread Size	Min	Max	Min	Max			A/C 'E'	A/F 'F'
16	473AA51	M16 × 1.5	473NP03	½" - 14 NPT	3.81	8.74	8.0	13.2	0.2 / 0.3	41	26.7	23.4
20SS	473AA71	M20 × 1.5			3.81	8.74	8.0	13.2	0.2 / 0.3	41	26.7	23.4
20S	473AA52	M20 × 1.5	473NP04	½" - 14 NPT	8.00	11.79	8.0	15.8	0.2 / 0.3	43	29.2	25.7
20S			473NP07	¾" - 14 NPT	8.00	11.79	8.0	15.8	0.2 / 0.3	43	31.8	27.9
20	473AA53	M20 × 1.5	473NP05	½" - 14 NPT	11.79	14.15	11.7	20.8	0.2 / 0.3	43	34.0	30.5
20			473NP08	¾" - 14 NPT	11.79	14.15	11.7	20.8	0.2 / 0.3	43	34.0	30.5
25	473AA55	M25 × 1.5	473NP10	¾" - 14 NPT	14.00	20.12	17.0	27.2	0.2 / 0.45	48	42.2	37.6
25			473NP14	1" - 11½ NPT	14.00	20.12	17.0	27.2	0.2 / 0.45	48	42.2	37.6
32	473AA56	M32 × 1.5	473NP15	1" - 11½ NPT	19.70	26.55	23.5	33.5	0.3 / 0.45	53	53.6	47.2
32			473NP20	1¼" - 11½ NPT	19.70	26.55	23.5	33.5	0.3 / 0.45	53	53.6	47.2
40	473AA57	M40 × 1.5	473NP21	1¼" - 11½ NPT	26.55	32.42	29.0	39.9	0.3 / 0.45	56	61.5	56.4
40			473NP27	1½" - 11½ NPT	26.55	32.42	29.0	39.9	0.3 / 0.45	56	61.5	56.4
50S	473AA58	M50 × 1.5	473NP28	1½" - 11½ NPT	32.42	38.39	38.0	46.2	0.3 / 0.45	61	66.0	60.0
50	473AA59	M50 × 1.5	473NP32	2" - 11½ NPT	38.39	44.33	39.5	52.6	0.3 / 0.45	61	77.2	70.1
63S	473AA60	M63 × 1.5	473NP33	2" - 11½ NPT	44.33	50.27	50.0	58.9	0.3 / 0.45	64	83.0	75.0
63	473AA61	M63 × 1.5	473NP38	2½" - 8 NPT	50.27	56.24	51.3	65.3	0.3 / 0.45	64	87.4	80.0
75S	473AA62	M75 × 1.5			56.24	62.18	62.0	71.6	0.3 / 0.45	73	99.1	90.2
75S			473NP44	3" - 8 NPT	56.24	62.18	62.0	71.6	0.3 / 0.45	73	109.2	98.8
75	473AA63	M75 × 1.5	473NP45	3" - 8 NPT	62.18	68.13	62.5	78.0	0.3 / 0.45	73	109.2	98.8
85	473AA64	M85 × 2			68.00	74.00	68.0	88.0	0.3 / 0.45	102	126.0	115.1

\* 1.5mm Pitch threads are supplied 15mm long, 2mm pitch threads are supplied 20mm long