

Universal terminations

UET connectors are intended as a simple method of terminating all solid aluminium conductors of both round and sector shaped cross section.

They can be pre-installed onto the busbar (for example, by the equipment manufacturer). The cable installer then needs only a 13mm socket/spanner for UET95, or a 19mm socket/spanner for UET185 or UET300 range, to complete the cable termination.

The standard product is supplied with one shear head conductor clamping bolt. The stud and other fixing accessories can be supplied as options. They are not included in the standard product.

These connectors can also be used on shaped stranded conductors. However, connectors with 2 shear bolts (UET95-44, UET185-55 & UET300-60) are recommended for improved tensile performance on such conductors.

Part No: - UETxxx-zz

- **xxx** is max. conductor size suitable for the connector (either 95, 185 or 300mm²)
- **zz** is the total length of the connector body.


Features

- No heat. No high-pressure tooling and dies
- Conductor installation requires only a simple 13 or 19mm socket/spanner
- Can be mounted either base or side onto the busbar or bushing

Standard

- Designed to meet requirements of BS4579 and ER C79

DATA SHEET Number: EPP-1730	Date: 01/12/2012 Revision: B
--------------------------------	---------------------------------

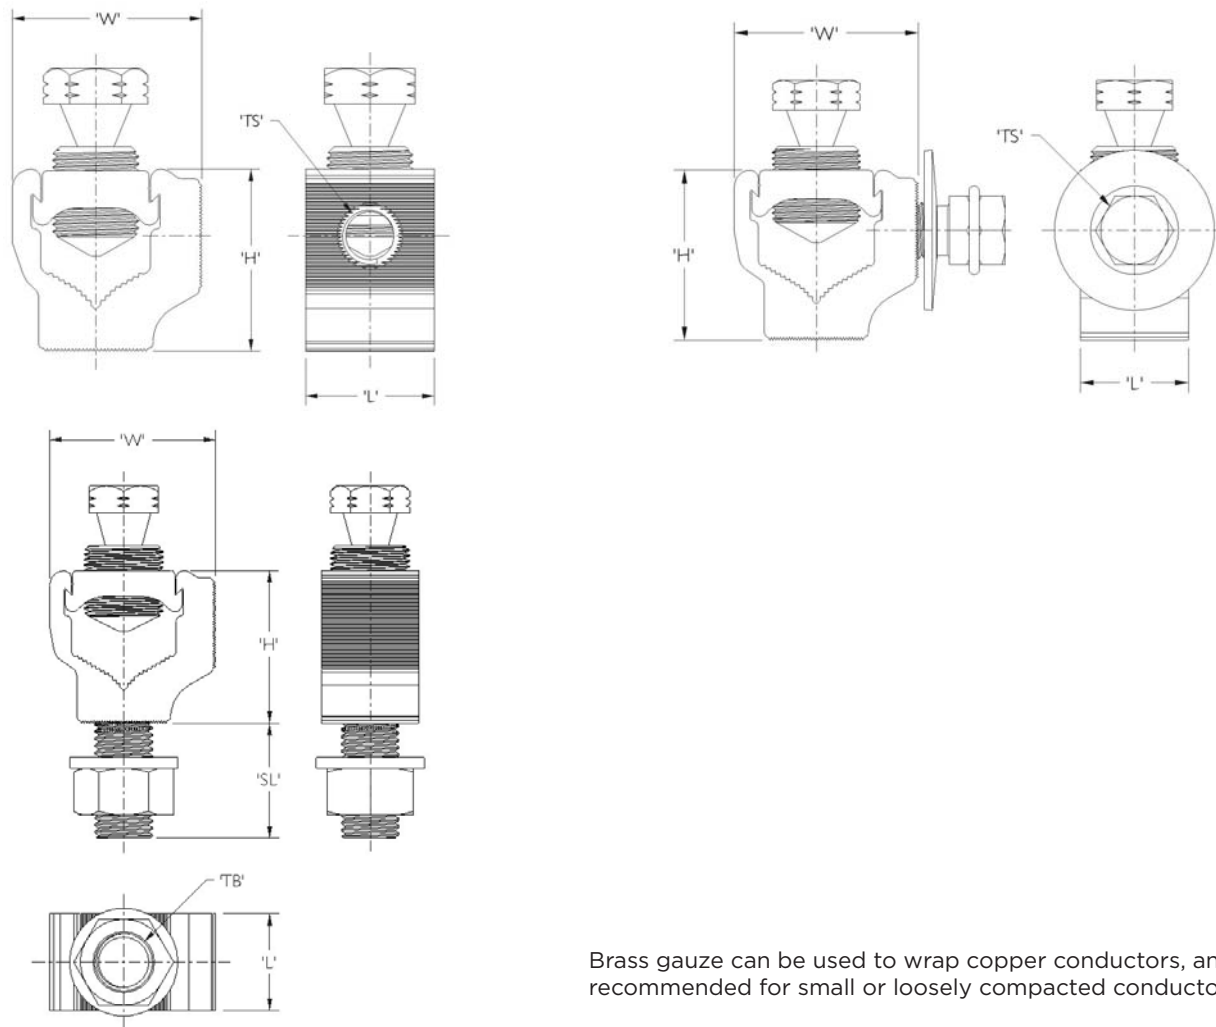

Brass gauze can be used to wrap copper conductors, and is recommended for small or loosely compacted conductors.

Reference	PN	TCPN	Dimensions (mm)			Conductor size (mm ²)	Socket/ Spanner A/F (mm)	TB	TS	SI
			L	H	W					
UET300/BM16SL40/B62M22	BAH-02601 0025	O29020-000	27	43	46	70-300	19	M16	-	32
UET185-27/SM12/A	BAH-02601 0061	E06379-000	27	39	40	35-185	19	-	M12	-
UET95-20/SM12/A	BAH-02601 0062	C07327-000	20	32	32	35-95	13	-	M12	-
UET300-27/SM14/DBL/A	BAH-02601 0063	E09750-000	27	43	46	70-300	19	-	M14	-

While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information in this catalog, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications. TE Connectivity and TE connectivity (logo) are trademarks.

© 2012 Tyco Electronics UK Ltd

TE Energy - innovative and economical solutions for the electrical power industry: cable accessories, connectors & fittings, insulators & insulation, surge arresters, switching equipment, street lighting, power measurement and control.

Tyco Electronics UK Ltd
 a TE Connectivity company
 Freebournes Road
 Witham, Essex CM8 3AH

Phone: +44 (0)870 870 7500
 Fax: +44 (0)870 240 5289
 Email: ukutilities@tycoelectronics.com

energy.te.com



DATA SHEET
 Number: EPP-1730
 Date: 01/12/2012
 Revision: B